

# ***FDX-M2P***

## ***User Manual***

Multi-mode Fiber Dual DVI-D Extender



Extends 2 DVI-D Signals, Audio and PS2 Keyboard and Mouse  
up to 1,400 feet over 2 Fiber Optic Cables

**Smart-AM**  
SMART AUDIO VIDEO INNOVATION

TABLE OF CONTENTS	
WHAT'S IN THE BOX?	2
INTRODUCTION	3
FEATURES	3
APPLICATIONS	3
TECHNICAL SPECIFICATIONS	4
HARDWARE INSTALLATION	5
EDID LEARNING—ON SCREEN DISPLAY	6
LIMITED WARRANTY STATEMENT	7

## WHAT'S IN THE BOX?

PART NO.	QTY	DESCRIPTION
FDX-TXM2P	1	Dual DVI-D, PS2 Keyboard & Mouse, Audio and RS232 Multimode Fiber Extender (Transmitter)
FDX-RXM2P	1	Dual DVI-D, PS2 Keyboard & Mouse, Audio and RS232 Multimode Fiber Extender (Receiver)
EN-SFX4P-EAR-P	4	Rack Mounting Brackets
CCPWR06	2	6' Power Plug Cable
	1	Quick Start Guide

## TRANSMITTER



Figure 2-1

## RECEIVER



Figure 2-2

## INTRODUCTION

The FDX-M2P consists of a transmitter and receiver that extend two DVI-D outputs, audio, PS2 keyboard, PS2 mouse and RS-232 Up to 1400 feet using multi-mode fiber optic cabling.

## FEATURES

- Dual channel DVI-D, audio, PS2 keyboard, PS2 mouse and RS-232.
- Top Signal Quality over Multimode Fiber (up to 1,400 feet)
- Video Resolutions up to 1920 x 1200 WUXGA at 60Hz
- Customizable/Programmable DDC Table for Mac/PC
- Fiber Plug Type LC
- Compatible With all Major KVM Switches
- Supports Mac, PC, and Linux DVI
- Uses universal DVI Single Link connectors
- Zero pixel loss with TMDS signal correction
- Rack Mountable Solution
- Plug-and-play

## WHY FIBER OPTIC?

SmartAVI has created a full line of fiber optic extender products, understanding that this technology is superior to traditional cabling. We use the highest quality fiber optic components for our products.

### Fiber optic cables are:

Capable of transmitting over very long distances with no signal loss.

Immune to electromagnetic interference. In situations where there is considerable interference, fiber optic cabling is the only solution.

Much more secure because they cannot be easily tapped. For this reason, military and law enforcement agencies use fiber optic cables for the transmission of sensitive data.

Relatively inexpensive and small enough to be routed through small spaces.

## APPLICATIONS

### MEDICAL FIELD

In the medical field where sensitive electronic devices are used, isolating workstation computers can be a matter of safety. The FDX-M2U allows the workstation computers to be housed in a central location, away from sensitive devices.

### INDUSTRIAL WORK AREAS

In industrial work areas that may be too harsh for a workstation computer, the FDX-M2P can consolidate the computers into a safe location.

### SECURE COMPUTING

When it comes to security, the FDX-M2P is an excellent deployment option. With the FDX-M2P, devices can be centralized and secured from public access. This, combined with the intrinsic security of fiber optic cable, make the FDX-M2P one of the most secure KVM solutions available.

### INFORMATION KIOSKS/DISPLAYS

As with most information booths and kiosks, there is a risk of damage or theft. The FDX-M2U is the best way to secure computer hardware, by consolidating it to a secure location away from public access.

<b>TECHNICAL SPECIFICATIONS</b>	
<b>VIDEO</b>	
Resolution	Up to 1920 x 1200 @60Hz
Format	DVI-D Single Link
Input Interface	(2) DVI-D 29-pin female
Output Interface	(2) DVI-D 29-pin female
Maximum Pixel Clock	165 MHz
DDC	Programmable Internal Table 5 volts p-p(TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
<b>AUDIO</b>	
Signal Type	Stereo Audio
Bandwidth	15MHz, 0dB
Impedance	10K Ohm
Input Interface	(1) 3.5 mm Stereo Audio Female
Output Interface	(1) 3.5 mm Stereo Audio Female
<b>USB</b>	
Input Interface	(1) 2.0 Type B Female
<b>OTHER</b>	
Fiber Extender	<ul style="list-style-type: none"> <li>• 738 ft. @ Multimode 62,5μ</li> <li>• 1476 ft. @ Multimode 50μ</li> </ul> Fiber-Plug type LC
Power	Internal 110-240 VAC
Dimensions	17" W x 5.75" D x 1.875" H
Weight FDX-TXM2P	2.45 lbs
Weight FDX-RXM2P	2.55 lbs.
Operating Temp.	32-131 °F (0-55 °C)
Storage Temp.	-4-185 °F (-20-85 °C)
Humidity	Up to 95% No Condensation
RS-232	Data up to 115,200 bps, N,8,1, No Flow Control
PS2	(2) Keyboard & Mouse

## HARDWARE INSTALLATION

1. Turn off the computer, displays, speakers and any peripheral devices.
2. Connect the USB cable from the computer to the FDX-TXM2P.
3. Optionally connect the RS-232 cable and audio cable from the computer to the FDX-TXM2P.
4. **Do not connect the DVI input from the computer to the FDX-TXM2P. (Link 2 only)**
5. Connect the DVI displays to the DVI connectors on the FDX-RXM2P. (DVI monitors recommended.)
6. Connect PS2 mouse and keyboard to the PS2 connectors on the FDX-RXM2P.
7. Optionally connect speakers and an RS-232 device to the FDX-RXM2P.
8. Connect the FDX-TXM2P to the FDX-RXM2P with multimode fiber-optic cables.
9. Power on the computer, displays, speakers and any peripheral devices.
10. Connect the power cords and power on the FDX-TXM2P and the FDX-RXM2P. The status LEDs will flash. It will take up to 30 seconds for the FDX-M2P to learn the EDID settings from the Link 2 connected DVI display. Once the EDID settings are learned the LEDs will stop flashing.
11. Connect the computer's DVI input (Link 2) to the FDX-TXM2P.

**WARNING:** Be careful not to cross the Video Link Fiber Optic cables. Video Link 1 on the FDX-TXM2P must be connected to Video Link 1 on the FDX-RXM2P. TX Video Link 2 must connect to RX Video Link 2.

**Note:** Reference the section on EDID LEARNING for the Link 1 input port.

HDMI monitors with DVI to HDMI adapters may work with DVI EDID settings loaded.

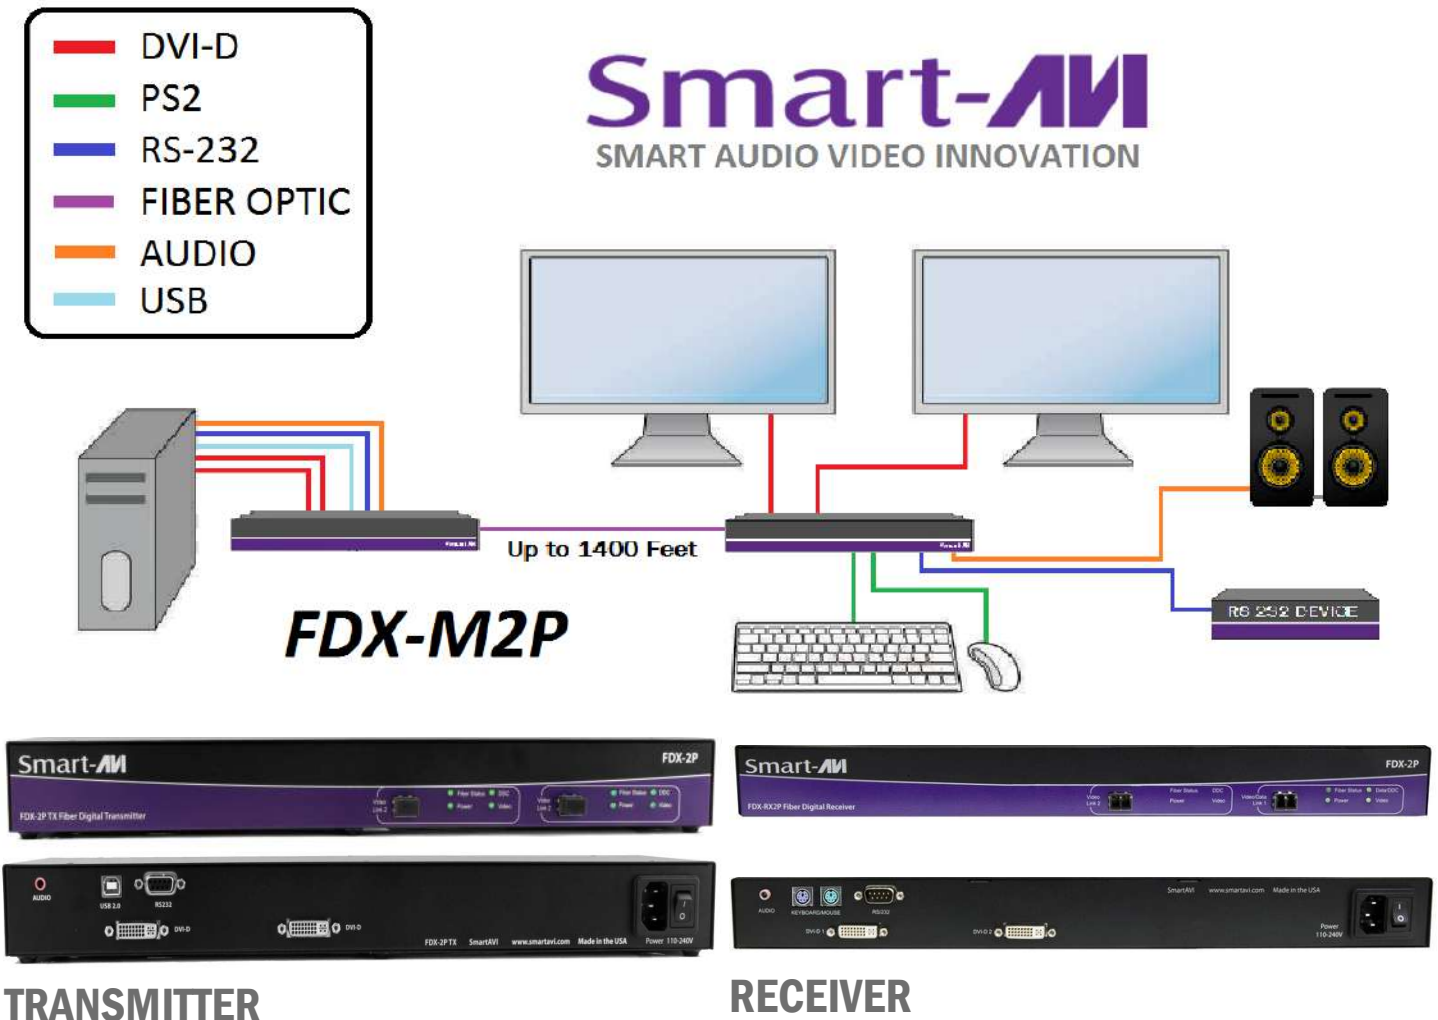


Figure 5-2

Figure 5-3

## EDID LEARNING—ON SCREEN DISPLAY

Pressing the “Ctrl” key twice followed by the letter “o” then hitting the “Enter” key activates the On Screen Display on Link 1.

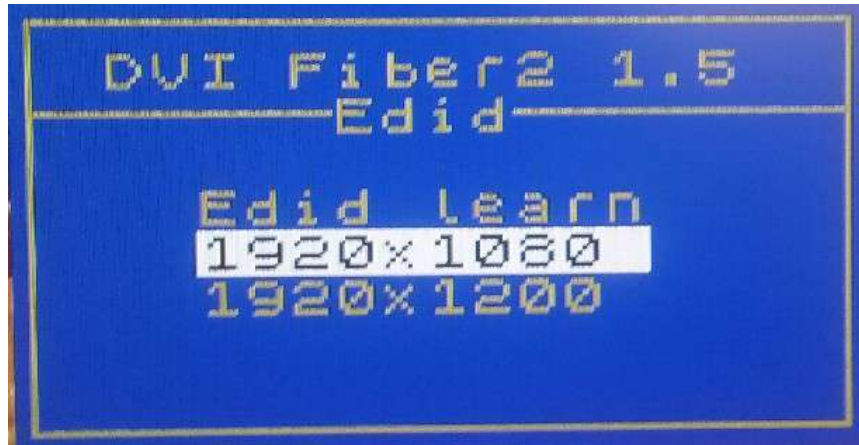


Figure 6-1

“Edid Learn” learns Edid settings from the monitor connected to Link 1.  
The “1920X1080” selection is for PC monitors.  
The “1920X1200” selection is for Mac monitors.

### Available On Screen Display Keyboard Commands

Ctrl Ctrl o Enter	Activate Onscreen Display Menu.
↓	Highlight next menu item down
↑	Highlight next menu item up
Enter	Execute highlighted selection
Esc Esc	Exit On Screen Display Menu

Table 6-2

# LIMITED WARRANTY STATEMENT

## A. Extent of limited warranty

Smart-AVI Technologies, Inc. warrants to the end-user customers that the Smart-AVI product specified above will be free from defects in materials and workmanship for the duration of 1 year, which duration begins on the date of purchase by the customer. Customer is responsible for maintaining proof of date of purchase.

Smart-AVI limited warranty covers only those defects which arise as a result of normal use of the product, and do not apply to any:

- a. Improper or inadequate maintenance or modifications
- b. Operations outside product specifications
- c. Mechanical abuse and exposure to severe conditions

If Smart-AVI receives, during applicable warranty period, a notice of defect, Smart-AVI will at its discretion replace or repair defective product. If Smart-AVI is unable to replace or repair defective product covered by the Smart-AVI warranty within reasonable period of time, Smart-AVI shall refund the cost of the product.

Smart-AVI shall have no obligation to repair, replace or refund unit until customer returns defective product to Smart-AVI.

Any replacement product could be new or like new, provided that it has functionality at least equal to that of the product being replaced.

Smart-AVI limited warranty is valid in any country where the covered product is distributed by Smart-AVI.

## B. Limitations of warranty

To the extent allowed by local law, neither Smart-AVI nor its third party suppliers make any other warranty or condition of any kind whether expressed or implied with respect to the Smart-AVI product, and specifically disclaim implied warranties or conditions of merchantability, satisfactory quality, and fitness for a particular purpose.

## C. Limitations of liability

To the extent allowed by local law the remedies provided in this warranty statement are the customers sole and exclusive remedies.

To the extent allowed by local law, except for the obligations specifically set forth in this warranty statement, in no event will Smart-AVI or its third party suppliers be liable for direct, indirect, special, incidental, or consequential damages whether based on contract, tort or any other legal theory and whether advised of the possibility of such damages.

## D. Local law

To the extent that this warranty statement is inconsistent with local law, this warranty statement shall be considered modified to be consistent with such law.

# Smart-AVI

SMART AUDIO VIDEO INNOVATION

## NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose. SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material. No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SmartAVI Technologies, Inc.

20170320



**Designed and Manufactured in the USA**

**800.AVI.2131**

**Tel: (818) 503-6200 Fax: (818) 503-6208**  
**11651 Vanowen St. North Hollywood, CA 91605**

**SmartAVI.com**