

V2V-MAX 3

Full 1080p HD Automatic Switcher with Integrated Scaler



HDMI, DVI, VGA, Composite, Y/Pb/Pr, and USB
Converter, Scaler, and Automatic Switcher

FEATURES

- Automatic switching
- Seven input ports: One 1080p HDMI output
- (1) CVBS NTSC and PAL with Audio input
- (1) DVI-D input
- (1) VGA with Local audio up to 1080p
- (2) HDMI inputs with automatic EDID learning
- (1) USB input supports flash disk drive: MPEG, H.264, RM/RMVB movie decode, JPEG, BMP, PNG
- Picture decode and MPEG1/2, MP3 audio decode
- Optional RS232 and IR remote control
- Front panel LED and On Screen Display menu selection
- HDCP 1.3 Compliant


APPLICATIONS

- Educational presentations
- Corporate Communication
- Business Meetings and Presentations
- Entertainment Venue Enhancement
- Home Entertainment
- Digital Business Displays
- Digital Art Installations
- Source-to-projection Simplification
- Server Monitoring
- ... and much more!

WHY SWITCH TO THE MAX 3

The V2V-MAX 3 seamlessly converts, scales, and switches multiple video connections for excellent 1080p high resolution HDMI output. With DVI, VGA, composite, Y/Pb/Pr, USB, stereo audio and HDMI support, the V2V-MAX 3 offers unparalleled connectivity with all sorts of AV equipment. Aging equipment finds new life with V2V-Max 3's integrated scaling and video conversion support, which automatically enhanced picture quality from older video source devices. Plug-and-play ready, the V2V is as easy to control as it is to set up. Simply connect it to your equipment and enjoy!

APPLICATION DIAGRAM

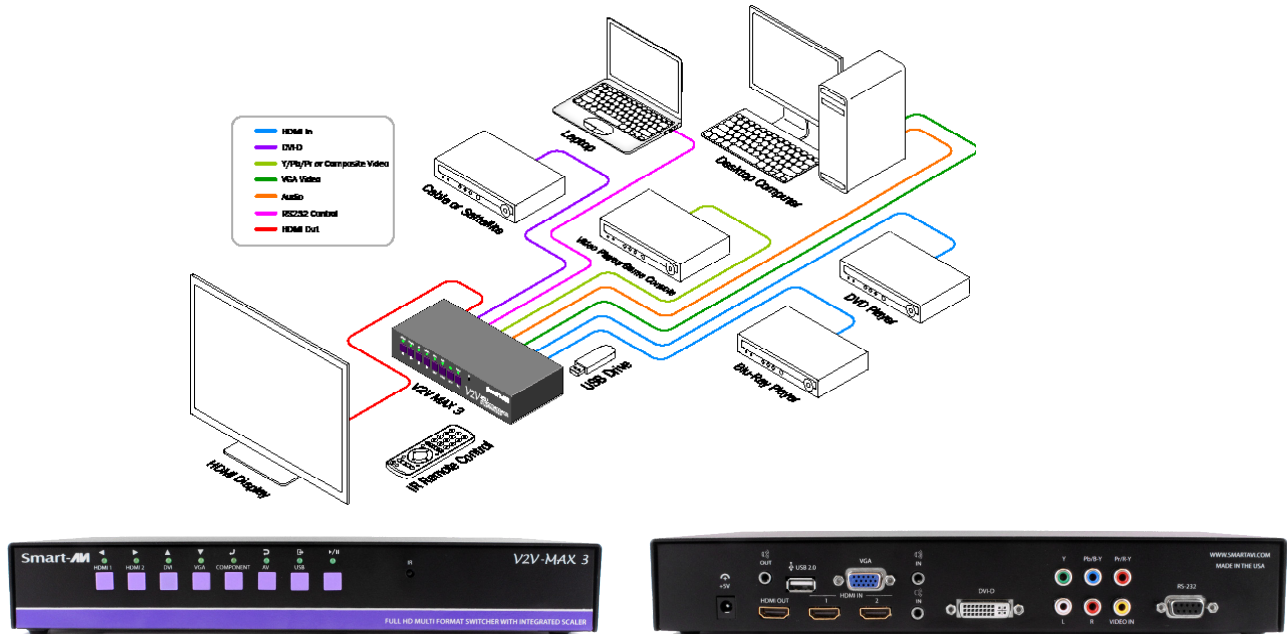

V2V-MAX 3 Front

V2V-MAX 3 Rear

SPECIFICATIONS

Specifications	
Input	(2) HDMI, (1) DVI, (1) VGA, (1) Y/Pb/Pr, (1) Composite, (1) 3.5mm Audio, (1) USB (Type A)
Output	(1) HDMI
Power Supply	110-220 VAC; 5VDC4A
Dimensions	10.0125 in. W x 2 in. H x 6 in. D
Operating Temperature	-5°C~ 35°C
Control	Front panel buttons, LED indicators, IR remote control, RS232 with simple protocol
Input Resolutions	640 x 480 @ 60Hz (VGA) up to 1920 x 1080 1080p HD (HDMI)
USB Input	MPEG, H.264, RM/RMVB movie decode, JPEG, BMP, PNG
HDMI Output Resolution	720P@60Hz, 1080P@60Hz

ORDERING INFORMATION

Part No.	Description
V2V-MAX 3	Multi Format Switcher, Scaler and Converter with IR Remote Control and Power Supply: Includes: [V2V-MAX 3, V2V-MXR, (PS5VDC4A)]



Designed and Manufactured in the USA

www.smartavi.com

Tel: 800.AVI.2131 • 818.503.6200 • 11651
Vanowen St. North Hollywood, CA. 91605

Smart-AVI
SMART AUDIO VIDEO INNOVATION