

Switch up to 3 HDMI sources to one HDTV display device with remote control support.




Connect up to 3 HDMI sources to a single HD Monitor. This advanced switcher allows you to switch between multiple HDMI sources (set top box, DVD player, video game stations, computer) and your HD displayer. This switcher passes both digital and audio signals through the HDMI ports.

FEATURES

- ▶ Connects up to three HDMI sources to one HDTV display device
- ▶ Maintains 480p, 720p, 1080i and **1080p** video formats
- ▶ Maintains highest HDMI single link video resolution and digital audio
- ▶ Supports HDCP compliant devices
- ▶ Both HDMI-HDMI and DVI-HDMI cables can be used to connect the inputs and switcher output
- ▶ Inputs can be selected from either the IR remote controller (included) or through the front panel “**INPUT SELECT**” button.

Application Diagram

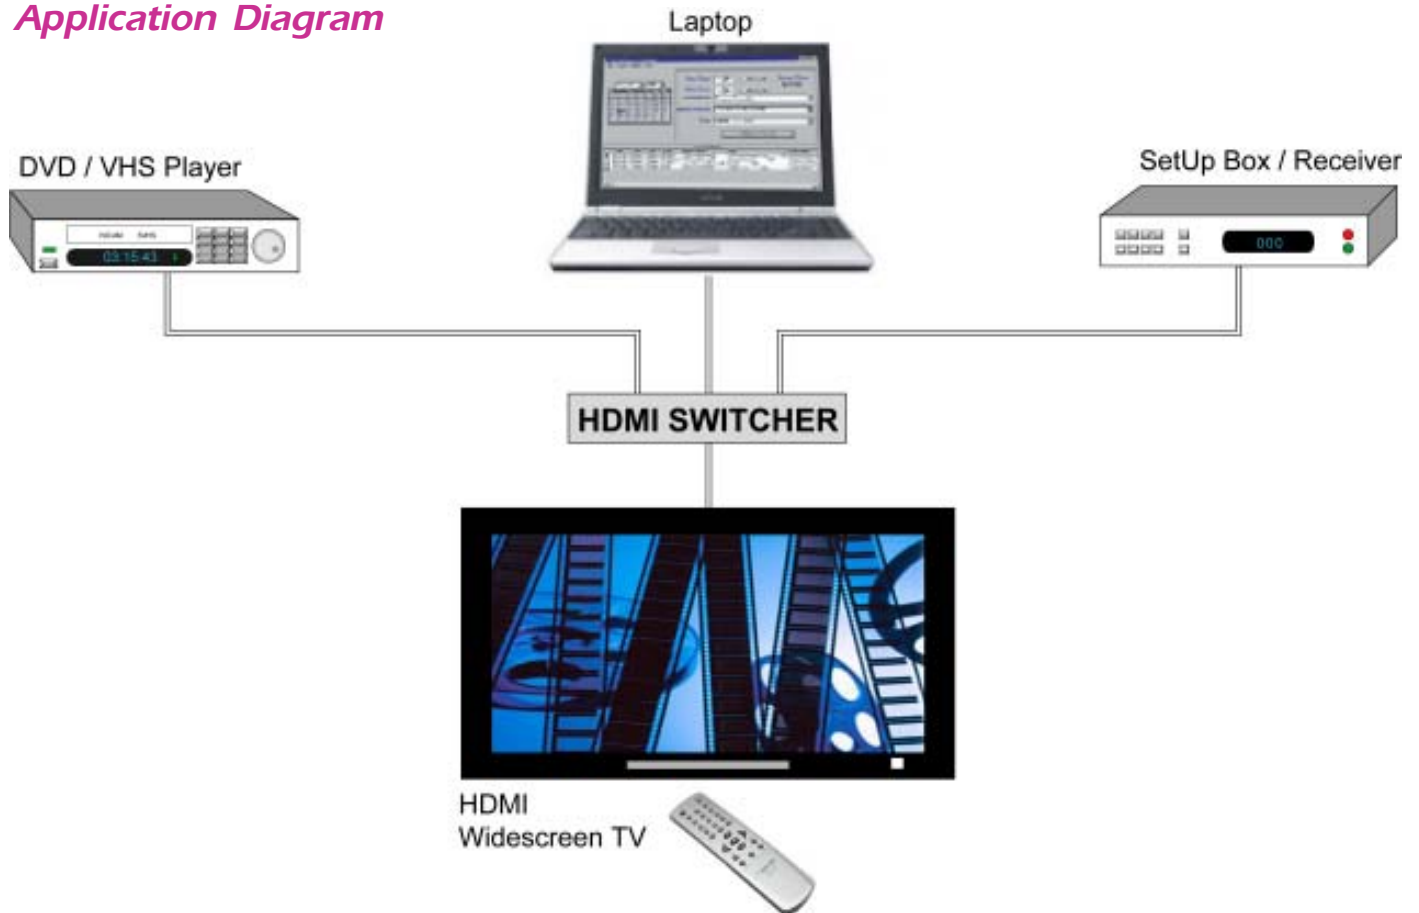

Front View



Rear View



SPECIFICATIONS

Video Amplifier Bandwidth	1.65GBps
Input Video Signal	v1.2
Input Connector	3 HDMI 19pin female
Output Connector	1 HDMI 19pin female
Total Cable Length	Up to 120 ft
Power Consumption	3.0W Max
Power Supply	6V DC, 1A
Dimensions (mm)	181.6(L) x 77.1(W) x 23.7(H)
Product Weight (Net)	360g

Applications

- ▶ Hotel
- ▶ Cable TV remote control
- ▶ Control rooms
- ▶ Remote On-Digital set-top control
- ▶ Sky box control extension and switcher output
- ▶ Dealer rooms
- ▶ Point of Sale
- ▶ Remote VCR control

ORDER INFO

Model	Description
HDSW31	HDMI/Digital Audio 3 port switch

SmartAVI, Inc.

3111 Winona Ave, Suite 101
 Burbank, CA 91504
 Tel: (818) 565-0011
 Fax: (818) 565-0020
 Email: info@smartavi.com
 www.smartavi.com